


QUICK DRYING WOOD GRAIN FILLER LACQUER BASED

An incredible time saver! This transparent, nitrocellulose lacquer based grain filler dries in 10 to 15 minutes. Seals and grain fills in a single step, though this is not a sanding sealer. Grain filling can be achieved in about four hours, grain dependant, of course. Top coat thereafter. Excellent product wherever productivity, and cost are a major issue. **This product was used throughout Wynn Las Vegas casino's woodwork, especially the mahogany, with breathtaking results, just visit their website.** Apply by brush or spray as per label directions. **Wait one hour then sand smooth only (with the grain), do not sand off.** Repeat second application*. In brushing application, the drying time may have to be slightly retarded with Magna-Shield® Retarder for better flow-out.

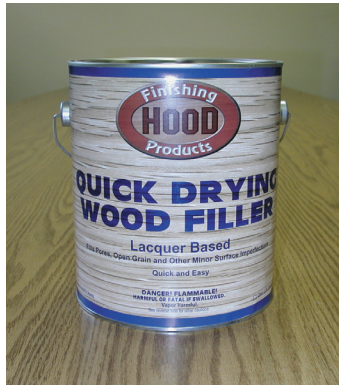

Available in natural color only at this time. More colors to come soon. Tintable with our Penetrating Stain (solvent based) or our U-T-C Colorants. Can be top coated with most lacquers, vinyl sealers, Magna-Shield®, conversion varnishes, HYDROCOTE® brand water-based finishes and most other water-based finishes including latex paints. Coverage, about 500 sq ft per gallon.

Available now also in water-clear version for light woods or stains.

97430	Straw Color	Quart	\$12.95
97431	Straw Color	Gallon	\$28.95
97435	Straw Color	Pail	\$98.95
97500	Water Clear	Quart	\$13.95
97501	Water Clear	Gallon	\$29.95
97505	Water Clear	Pail	\$102.95
MS9900	(Retarder)	Quart	\$9.95
MS9901	(Retarder)	Gallon	\$18.95

*Applying too many coats can affect clarity of the filler. As such, only **two coats** should be applied over mahogany or walnut and three coats over **natural oak** or a light stain.

HYDROCOTE® QUICK DRYING WOOD FILLER



Water-based version to the above lacquer based grain filler. Apply by brush or spray. Seals and fills the grain in a single step.

Available in natural color. Tintable with our HYDROCOTE® Tinting Colors. Can be topcoated with HYDROCOTE® brand water-based finishes, most other water-based finishes including latex paints, our EVERLAST Wood Finish and most conventional lacquers. Coverage, about 500 sq ft per gallon.

For best results, consult label directions prior to use.

61700	Quart	\$12.95
61701	Gallon	\$29.95

PASTE WOOD GRAIN FILLER CONVENTIONAL (OIL-BASED)



Superior quality conventional oil-based wood filler. Use to fill open pores and impart contrasting color to the grain. A must for high grade rubbed out finishes on open grain woods. May be tinted with our U-T-C Tinting Colors, Penetrating Stain, or Japan Colors. Optimum drying time is 24 hours prior to finishing. Thin with VM&P Naphtha instead of Mineral Spirits to speed up drying time to 12 hours prior to finishing.

For optimum results, consult label directions prior to use.

97420-01	Natural	Quart	3#	\$13.95
97421-01	Natural	Gallon	12#	\$29.95
97420-02	Mahogany	Quart	3#	\$13.95
97421-02	Mahogany	Gallon	12#	\$29.95
97420-03	Walnut	Quart	3#	\$13.95
97421-03	Walnut	Gallon	12#	\$29.95

PASTE WOOD FILLER APPLICATORS

6 or 8 inch wide plastic applicators designed to reduce elbow grease and sanding time of oil-based conventional paste wood fillers upon drying, our brand or any other of similar type. Provides better packing in the grain (thus minimizes shrinkage with cure) as well as reduces product waste. For best results, apply the paste wood filler by brush, **with the grain**, then remove the excess with this applicator working **against the grain holding the applicator at 45° angle**, followed by **with the grain holding at 45° angle as well** to leave surface filler free and much easier to sand.



31025 (6")	\$1.95
31026 (8")	\$2.95