

WOOD REPAIR PRODUCTS

HOODBOND™ INSTANT ADHESIVES

A revolutionary cyanoacrylate adhesive system for bonding a wide variety of materials at room temperature; wood to wood, wood to plastic, etc. Available in three thicknesses to meet all your gluing needs. Thin viscosity for tight fitting pieces; medium viscosity for pieces that do not fit flush; thick viscosity for pieces with large gaps. Use of Hoodbond™ Activator speeds up bond time and is available in three sizes, 2 oz spray bottles and 8oz and 32 oz refill bottles. In the event of mistakes and clean up, use Hoodbond™ Debonder.



Prod #	DESCRIPTION	SIZE	PRICE
130-0010	Thin Viscosity	2 oz	\$ 6.95
130-0300	Medium Viscosity	2 oz	\$ 6.95
130-1500	Heavy Viscosity	2 oz	\$ 6.95
141-002	Activator	2 oz	\$ 3.95
141-008	Activator (refill)	8 oz	\$ 7.95
141-032	Activator (refill)	32 oz	\$29.95
131-008	Debonder	8 oz.	\$10.95

EZ-FILL™ WOOD REPAIR PUTTY (ODORLESS)

Accepts stain better than any other water-based putty on the market. More important, accepts stain same as surrounding wood. Minimum shrinkage after drying. Use on bare wood to repair cracks, knot holes, nail holes, mitre joints and other small imperfections prior to staining and/or finishing. Suitable under lacquers and virtually all water-based finishes. Ready to sand on small repairs in about 5 minutes. Sands easy, just like wood.



84299	Pint	\$ 3.95
84200	Quart	\$ 6.95

Accepts Stain Like No Other Water-Based Putty

QUIK TIME™ WOOD REPAIR PUTTY

LACQUER BASED - FAST DRYING



Lacquer based putty, fast drying. Use on bare wood or over a finish to repair cracks, knot holes, nail holes, mitre joints and small imperfections prior to finishing. Ready to sand on small repairs in a couple of minutes. Fine texture - sands just like wood. Accepts stain same as surrounding wood. Minimum shrinkage after drying. Available in white and natural only at this time.

97410-01	White	Quart	\$6.95
97410-02	Natural	Quart	\$6.95
97400	Reducer	Pint	\$4.95

QUIKWOOD® EPOXY

WOOD REPAIR PUTTY

QUIKWOOD® is a remarkable polymer compound for instant wood repair. Easy-to-use, QUIKWOOD® molds like clay, then dries like wood in 30 minutes. QUIKWOOD® is also great for wood-to-wood and wood-to-metal bonding. QuikWood® epoxy resembles pale-toned unfinished wood. Fills holes, scratches, gauges, cracks, dry rot and knot holes. Packaged in a 2 oz tube.



"The Woodworker's Dream"

67040	Natural	\$3.95
-------	---------	--------

ALL PURPOSE WOOD GLUE

Superior quality carpenter's glue that is **non-flammable, non-combustible and non-toxic**. Resists heat, alcohol, water, lacquers and varnishes. Excellent for cabinets, furniture, and general wood repairs. *Fast grabbing, fast setting, super strong.* Available in White and Yellow. **The yellow is same in performance as Titebond™ brand glue.**



99001	White	Gallon	\$18.75
99005	White	Pail	\$79.95
99101	Yellow	Gallon	\$19.75
99105	Yellow	Pail	\$79.95

WOOD TONE™ POLYESTER FILLER



Polyester formulation designed for the large and/or difficult repairs where lots of material must be used to make the repair. The hardener supplied with the product must be added to accelerate the cure time and minimize shrinkage. Can be tinted with Touch-Up powders or U-T-C- colorants. Cured material can be sanded or carved to the desired shape.

Quart	97440	\$12.95
Extra Hardener	97441	\$2.95

WHISPER WOOD™ SYNTHETIC WOOD PUTTY

A high quality wood putty that is easy to apply. When dry, it can be sanded, planed, sawed or even nailed. Slight scratches and nail holes will dry and can be sanded in about 5 minutes. Accepts stain well but not as good as EZ-FILL Wood Repair Putty above. Non-Hazardous.




CAT#	SIZE	PRICE
77707-XX	Pint	\$8.95

COLOR	COLOR #	COLOR	COLOR #
Red Oak	40	Fir/Maple	48
White Oak	41	White	49
Cherry/Mahogany	46	Natural	50

QUICK DRYING WOOD GRAIN FILLER LACQUER BASED

A miracle product to say the least! This transparent, nitrocellulose lacquer based filler dries in 10 to 20 minutes. Grain filling can be achieved in about four hours, grain dependant Top coat thereafter. Excellent product wherever productivity, and cost are a significant issue. Apply by brush or spray as per label directions. **Wait one hour then only sand smooth with the grain, do not sand off.** Repeat second application*. Available in natural color only. Tintable with our solvent based stains or our U-T-C Colorants. Can be top coated with most nitrocellulose lacquers, pre-cat lacquers, conversion varnishes, HYDROCOTE® brand water-based finishes and most other water-based finishes including latex paints. Coverage, 500-600 sq ft per gallon.

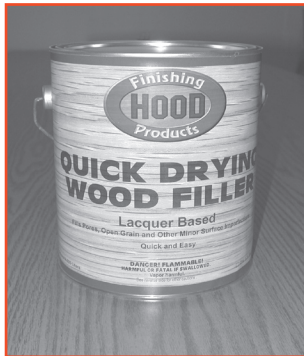

This product is amber tone in color, like a regular lacquer hence not recommended over light color stains
For optimum results, consult label directions prior to use.

*Applying too many coats can affect clarity of the filler. As such, only **two coats** are recommended over mahogany or walnut and three coats over **natural oak**.

97431	Gallon	10#	\$28.95
97435	Pail	40#	\$98.95
MS9901 (Retarder)	Gallon	10#	\$19.95

WOOD CONDITIONER

Prevents blotching of stains on soft woods such as pine and fir, and black spots on cherry and maple. Quick drying; stain over in 30 minutes. Non-grain raising. Excellent under any solvent or water based stains susceptible to blotching, including Minwax Stain. Follow label directions prior to use.



47900	Quart	\$ 9.95
47901	Gallon	\$18.95

PASTE WOOD FILLER APPLICATORS

6 or 8 inch wide plastic applicators designed to reduce sanding time of the conventional paste wood filler (shown below at left) upon drying. Provides better packing in the grain (thus minimizes shrinkage with cure) as well as reduces waste. For best results, apply the paste wood filler by brush, **with the grain**, then remove the excess with this applicator working **against the grain holding the applicator at 45° angle**, followed by **with the grain holding at 45° angle** to leave surface filler free and much easier to sand.



31025 (6")	\$1.95
31026 (8")	\$2.95

PASTE WOOD GRAIN FILLER CONVENTIONAL (OIL-BASED)



Superior quality conventional oil-based wood filler on the market. Use to fill open pores and impart contrasting color to the grain. A must for high grade rubbed finishes on open grain woods. May be tinted with our U-T-C Tinting Colors, Wiping Stains, or Japan Colors. Optimum drying time is 24 hours prior to finishing. Thin with VM&P Naphtha instead of Mineral Spirits to speed up drying time to 12 hours prior to finishing.

For optimum results, consult label directions prior to use.

97420-01	Natural	Quart	3#	\$13.95
97421-01	Natural	Gallon	12#	\$29.95
97420-02	Mahogany	Quart	3#	\$13.95
97421-02	Mahogany	Gallon	12#	\$29.95
97420-03	Walnut	Quart	3#	\$13.95
97421-03	Walnut	Gallon	12#	\$29.95



FAMOWOOD® PUTTY/FILLER

This quick drying, easy sanding putty, resists cracking or shrinkage. Non-toxic. Can be stained over upon drying with a water or solvent-based stain. Please consult label directions prior to use. Available in 6 popular colors in pint size only.

\$7.45

Color	
Birch	22106
Golden Oak	22152
Natural	22126
Walnut	22124
White	22144
Cherry/Mahogany	22112
Red Oak	22134